

➤ 1、型号编制说明

$$\frac{\text{QKC-SDHRQ}}{1} - \frac{\square}{2} - \frac{\square}{3} - \frac{\square}{4} \frac{\square}{5}$$

1 QKC-SDHRQ ——

2 BS ——

GS ——

3 A ——

4

5

B ——

➤ 2、换热量确定




➤ 3、台数确定

➤ 4、注意事项

- | | |
|---|----|
| 1 | 5 |
| 2 | 25 |
| 3 | |
| 4 | |

- **BS** -

QKC-SDHRQ-BS-		A B -320 5	A B -260 5	A B -200 5	A B -150 5	A B -100 5	A B -065 5
kW		2400	1950	1500	1125	750	487
		25~15	25~15	25~15	25~15	25~15	25~15
t/h		206	170	130	100	65	42
kPa		50	50	50	50	50	50
mm		200	200	150	125	125	100
		10~20	10~20	10~20	10~20	10~20	10~20
t/h		206	170	130	100	65	42
kPa		50	50	50	50	50	50
mm		200	200	150	125	125	100
mm		5700	5260	4860	4550	3850	3700
mm		1020	910	810	680	800	540
mm		2550	2680	2620	2500	1900	1720
		15.8	13.3	10.2	7.5	5.3	3.7
		26.8	21.3	17.4	12.6	9.2	6.1

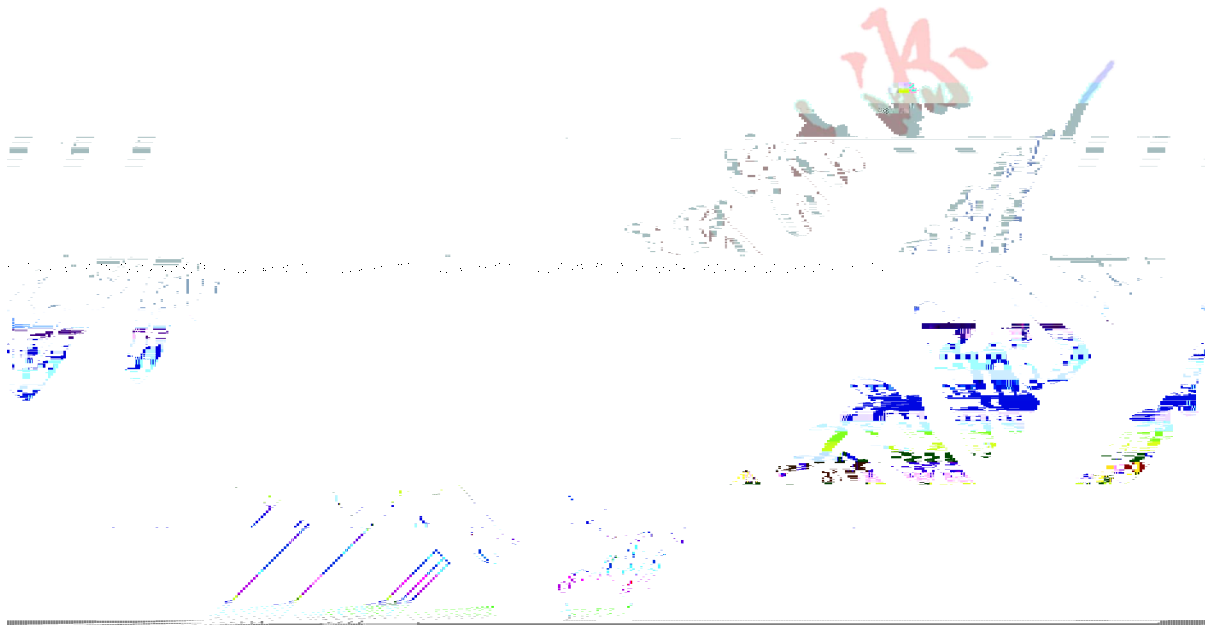

- GS -

QKC-SDHRQ-GS-		A B -320 5	A B -260 5	A B -200 5	A B -150 5	A B -100 5	A B -065 5
kW		2400	1950	1500	1125	750	487
		25~15	25~15	25~15	25~15	25~15	25~15
t/h		206	170	130	100	65	42
kPa		50	50	50	50	50	50
mm		200	200	150	125	125	100
		10~20	10~20	10~20	10~20	10~20	10~20
t/h		206	170	130	100	65	42
kPa		50	50	50	50	50	50
mm		200	200	150	125	125	100
mm		5800	5200	4800	4500	4000	3900
mm		1090	980	870	680	600	420
mm		2700	2600	2650	2600	2100	2050
		15.1	12.4	10.3	7.3	5.2	3.6
		26.5	21.5	17.4	12.6	9.0	6.5

- GS -

